

# PotStream® Adjustable Flow



The PotStream® is a side mounted watering solution for pot plants and containers. The adjustable gentle stream pattern minimises soil erosion and the variable flow rate and pattern radius allows for use in various pot sizes.

### Features

- Variable flow rate and pattern size suits pot diameters of 200 mm and upwards.
- Suits pot wall thickness up to 40 mm.
- Side mounted installation for neat location of the supply tube.
- Low application rate and gentle stream pattern.
- Easily adjustable knob for varying spray patterns.

### Applications

Potted plants, planter boxes and containers.

### Performance Chart

Pressure (kPa)	Flow (lph)	Radius (mm)
50	0 - 16	0 - 235
100	0 - 22	0 - 245
150	0 - 27	0 - 260
200	0 - 31	0 - 280
250	0 - 36	0 - 300
300	0 - 39	0 - 330

### Ordering Information - Potstream®

Description	Order Code	Pack Quantity	Packs per Carton	Carton (kg)
PotStream® Adjustable Flow	31455	25	20	6.3
PotStream® Assembled w/ 600 mm Tube & Adaptor	31465	10	20	7.4

### Specifications


Dimensions Assembled		UV Stabilised Material		Colour		Base/Connection Type	
HEIGHT	220 mm	STAKE	polypropylene	STAKE	Black	INLET	barb 4.5 mm
WIDTH	22 mm	KNOB	HDPE	KNOB	Black		
DEPTH	75 mm						
WEIGHT (approx.)	11 g						

### Typical System

Key:

- A - Pressure Regulator
- B - Nut & Tail
- C - Filter
- D - Elbow
- E - Take-off/Joiner
- F - Tidy Bow™ Elbow

- G - PotStream®
- H - Tee
- I - End Sleeve
- J - 13 mm Supply Tube
- K - 4 mm Micro Tube

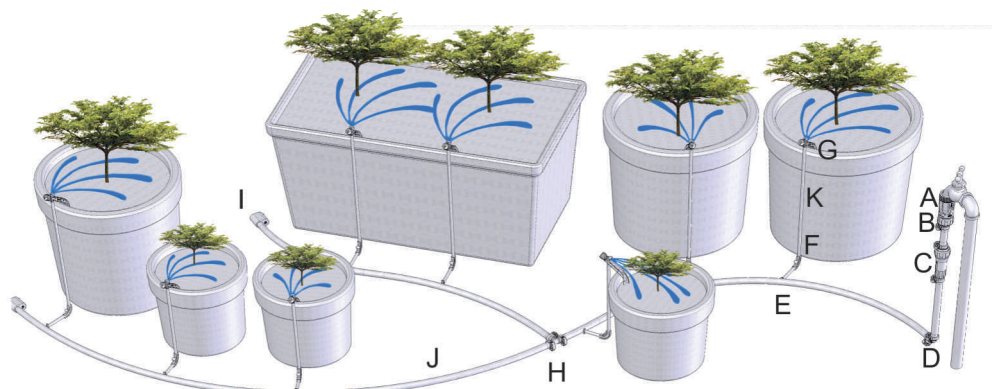

PotStream® Adjustable Flow

NEW

PotStream® Assembled w/ 600 mm Tube & Adaptor

Tidy-Bow™ Clip On Elbow  
Code: 45345

\*Refer to page 40 for ordering information